


Web-IO 4.0 Analog-In/Out

The combined solution for analog in- or output signals brings your measurement values into the network and back to the terminal.

Use the Web-IO Analog-In/Out to measure analog signals, tunnel them through the network and output them again as analog signals at a remote location. For example you can control an analog meter which displays the level of a distant tank.

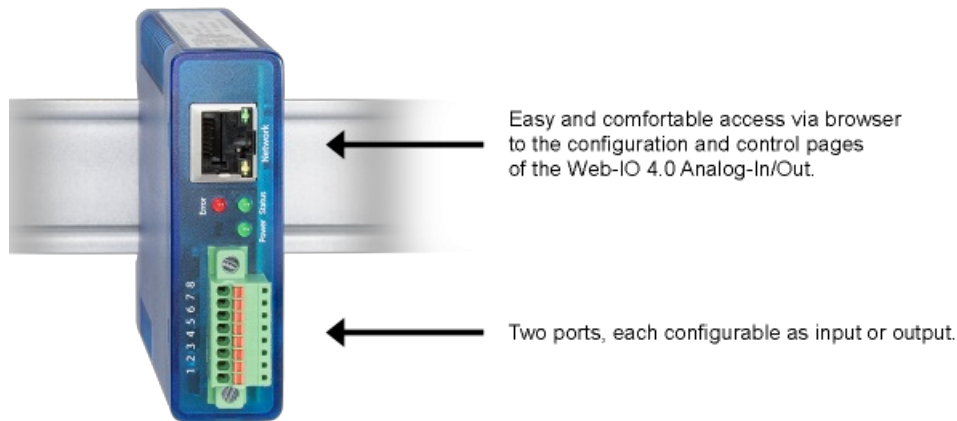

Technical data

Art.: #57761 (2x 0-20mA)

Current input passive:	0-20mA, 100Ohm
Current input active:	0-20mA, burden max. 500Ohm, active voltage U_{max} 14V / 40mA
Current output:	0 - 20mA, burden max. 500 Ohms, supply 10V guaranteed
Current loop monitoring:	Short circuit protected and open-loop detection

Measuring unit

Resolution:	Current input: 2.5 μ A
Measuring error:	max. 0.5% FSR (Full Scale Range 0-20mA) $T_A = 0-60^\circ\text{C}$
Storage frequency:	15, 30 sec., 1, 5, 15, 60 min
Memory depth:	min. 150 days, max. 99 years
Measurement value acquisition: (can be polled over the network and trigger an alarm)	2/second

Art.: #57762 (2x 0-10V)

Voltage input:	0-10V, 1M Ω
Voltage output:	0-10V, I_{max} 20mA Sense line can be activated

Measuring unit

Resolution:	Voltage input: 1.25mV
Measuring error:	max. 0.5% FSR (Full Scale Range 0 - 10V) $T_A = 0-60^\circ\text{C}$

Storage frequency:	15, 30 sec., 1, 5, 15, 60 min
Memory depth:	min. 150 days, max. 99 years
Measurement value acquisition: (can be polled over the network and trigger an alarm)	2/second

The Web-IO 4.0 Analog-In/Out brings your analog measurements into the network and allows you to connect analog meters, as well as a variety of other application possibilities.

Now test for 30 days with no obligation:

[Version with current connections \(0 - 20mA\)](#) 

[Version with voltage connections \(0 - 10V\)](#) 

More information about the Web-IO Analog-In/Out can be found at: www.wut.de/57761 or www.wut.de/57762



We are available to you in person:

Wiesemann & Theis GmbH
Porschestr. 12
42279 Wuppertal
Phone: +49 202/2680-110 (Mon.-Fri. 8 a.m. to 5 p.m.)
Fax: +49 202/2680-265
info@wut.de

© Wiesemann & Theis GmbH, subject to mistakes and changes: Since we can make mistakes, none of our statements should be applied without verification. Please let us know of any errors or misunderstandings you find so that we can become aware of and eliminate them.

[Data Privacy](#)