


Data sheet:

20mA interface module (5V and 12V) for serial PC cards and Com-servers using 10/100BT

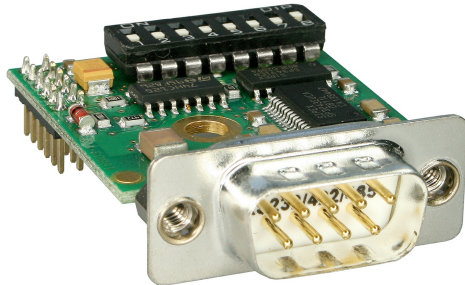

Article no.: 18411

EUR 55.00

*Net price for commercial users

[Add to cart](#) [Sample order](#) [Request a quote](#) [Contact](#) [Manual](#)

Freely selectable serial interface

W&T interface modules equip devices having only a serial TTL interface with almost any desired standard interface type. In addition the modules allow you to adapt the interface types of many W&T devices over a wide range. The modification is done by simply replacing the standard interface modules with modules of the desired interface type.

Properties

Interfaces:

- **1 x serial standard interface**
 - 9-pin SUB-D connector
- **1 x TTL interface**
 - 12-pin male header with 2mm spacing

Management and connectivity:

- **Tiny plug-in interfaces**
- **Interface**
 - 20mA

Standards & more

- **Conforms to standards both in office and industrial environments:**
 - High noise resistance per EN 61000-6-2
 - Low noise emission per EN 55032:2015 + A1 Cl. B, EN 61000-3-2 & EN 61000-3-3
- **5 year guarantee**

♥ Wish for something!
[Your suggestions for improvement and additions](#)

Technical data

Connections and displays:

TTL plug adapter:	Terminal strip, 2mm spacing
Serial port:	9-pin SUB-D adapter
Transfer rate:	max. 19.2 kBaud
Signals:	RxD,TxD
Operating modes:	active/passive mode
Power supply:	5V, 10mA / 12V, 40mA (typ.)

Dimensions and other data

Dimensions: 45 x 32 x 14mm (L x W x H)

Enclosure rating: IP00

Weight: approx. 15g



[We are available to you in person:](#)

Wiesemann & Theis GmbH

Porschestra. 12

42279 Wuppertal

Phone: +49 202/2680-110 (Mon.-Fri. 8 a.m. to 5 p.m.)

Fax: +49 202/2680-265

info@wut.de

© Wiesemann & Theis GmbH, subject to mistakes and changes: Since we can make mistakes, none of our statements should be applied without verification. Please let us know of any errors or misunderstandings you find so that we can become aware of and eliminate them.

[Data Privacy](#)