


W&T connects

Interfaces for TCP/IP, Ethernet, RS-232, RS-485, USB, 20mA,
glass and plastic fiber optic cable, http, SNMP, OPC, Modbus TCP, I/O digital, I/O analog, ISA, PCI



USB-Hub for the control cabinet

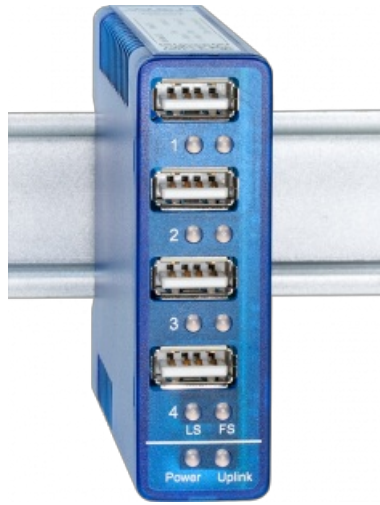

- Full USB 2.0 speed (USB 1.0 / 1.1 compatible)
- Wide-range input for voltages from 24 - 48V DC
- Compact USB hub for industrial environments. Noise immunity in accordance with EN 61000-6-2
- All four ports have 500mA load capacity
- Plug and Play without additional drivers
- For additional information: www.WuT.de/33601
- Just 198.00 Euro plus VAT where applicable

Test at no charge*

* Commercial customers can also test the USB-Hub for 30 days at no charge; if the USB-Hub does not meet your requirements, you can return it within 30 days.

Special Features

DIN rail mount per DIN EN 50022-35

Dimensions just:
105 x 75 x 22mm

Extended operating temperature range up to 70°C

Thanks to selected temperature-resistant components.

Multi-TT USB-Hub (Transaction Translator)

Full speed on all downstream ports even in mixed operation.

We are available to you in person:

Wiesemann & Theis
GmbH
Porschestra. 12
42279 Wuppertal
Phone: +49 202/2680-110 (Mon.-Fri. 8 a.m. to 5
p.m.)
Fax: +49 202/2680-265
info@wut.de

© Wiesemann & Theis GmbH, subject to mistakes and changes: Since we can make mistakes, none of our statements should be applied without verification. Please let us know of any errors or misunderstandings you find so that we can become aware of and eliminate them.

[Data Privacy](#)