

Data sheet:

RS232 Universal Serial T-Switch

Article no.: 85644



Unfortunately, this article is no longer available.

Connecting three serial terminal devices

The Universal Serial T-Switch enables practically any imaginable uni- or bi-directional connection of three serial terminal devices. The T-switch has three serial terminals, each of which can be freely configured.

Properties

Interfaces:

- **3x RS232/422/485, 9-pin SUB-D connector**

Management and connectivity:

- **Operating modes:**
 - Changeover using control sequences:
 - 1 computer runs for example two serial devices
 - time-controlled switching with adjustable switch time:
 - 2 computers share for example one serial terminal device:
 - Printer, plotter, hand scanner, card reader, etc...
- **No manual intervention necessary**
- **Data back channel allows connection of bi-directional peripheral devices**
- **Individual configuration of interfaces**
- **Conversion of baud rate, data format and handshake protocol possible**
- **Integrated diagnostic and startup aid: Setting dump**

Power supply:

- **External power**
 - Wide voltage range up to 24V

Standards & more

- **Conforms to standards both in office and industrial environments:**
 - High noise resistance per EN 61000-6-2
 - Low noise emission per EN 55032:2015 + A1 Cl. B, EN 61000-3-2 & EN 61000-3-3
- **5 year guarantee**

♥ Wish for something!
Your suggestions for improvement and additions


Worth knowing

Notes on use:

The W&T RS232 Universal Serial T-Switch is an extremely versatile device. Virtually any uni- or bi-directional 2:1 coupling of RS232 devices is possible with this switch.

The Adapter has 3 serial ports: 1 Master port "C" and 2 Slave ports "A" and "B". Each of these ports can be parameterised independently of the others.

The Switch supports 4 data channels (Master C <-> Slave A, Master C <-> B), which are equipped in each direction with 1 MB buffers. The channels are switched either timed or using control sequences from one of the three Switch ports.

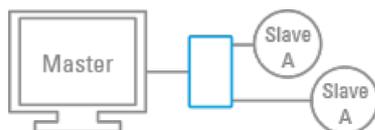

Technical data

Connections and displays:

Serial ports:	3x RS232/422/485 (Port A, B and C: plug) all ports can be configured independently of each other
Supported signals:	RxD, TxD, CTS, DTR
Baud rate:	150..115,200 baud
Data format:	7,8 data bits, no,even,odd parity
Flow control:	Hardware handshake or XON/XOFF protocol
Integrated buffer:	4 MB
Operating modes:	Switching via control sequence time-controlled switching
Switching times:	Adjustable in increments of 5, 15, 30, 120 seconds (other values on request)
Power supply:	12..24V DC/AC
Current consumption:	Typ. 30 mA at 24V DC
Supply voltage connection:	Plug-in screw terminal, 5.08mm spacing Labeled "L+" and "M"

Housing and other data:

Housing:	Plastic housing, 105 x 75 x 45mm
Weight:	approx. 150g
Ambient temperature:	Storage: -40..+70°C, Operation: 0..+60°C
Permissible relative humidity:	0..95% RH (non-condensing)
Scope of delivery:	1 x Universal Serial T-Switch, 4 MByte Buffer



We are available to you in person:

Wiesemann & Theis GmbH
Porschestra. 12
42279 Wuppertal
Phone: +49 202/2680-110 (Mon.-Fri. 8 a.m. to 5 p.m.)
Fax: +49 202/2680-265
info@wut.de

© Wiesemann & Theis GmbH, subject to mistakes and changes: Since we can make mistakes, none of our statements should be applied without verification. Please let us know of any errors or misunderstandings you find so that we can become aware of and eliminate them.

[Data Privacy](#)